

LTR-T LONG LIFE **SPRING BRAKES**

Built to the highest quality standards

LTR-T
Model Shown



MGM Brakes

Form 5036

LTR-T Model Spring Brakes

Built to the highest quality standards for dependable performance and long life.
The MGM Model LTR-T Spring Brake offers a combination of
features that assure maximum performance.

Built-in Manual Release Bolt

Permanently installed, can't get lost. Permits safe, easy release of the actuator to move the vehicle in the absence of air.

Tamper-Resistant Design

Prevents inadvertent disassembly of power spring housing.

Push Rod Air Seal

Nitrile rubber material. Provides maximum protection against air leaks. Nylon guides prevent metal-to-metal wear and stabilize rod travel.

"Stroke Alert" Indicator

Highly visible orange paint on black epoxy-coated push-rod.

Self-Locking Nuts

Always stays tight, eliminates the need for lock washers.

New Heavy-Duty "Long Life" Power Spring

Powerful, reliable. Flexible epoxy coating for corrosion protection.

External Breather Tube

Vents air from the protected service brake chamber to effectively seal out any liquid or solid corrosive airborne contaminants.

Heavy-Duty Diaphragms


Cold weather natural rubber for longer service life and resistance to deterioration. Low temperature range to -65°F. Suitable for extreme operating conditions.

Non-Pressure Chamber

Heavy-duty embossed steel epoxy-coated for long life.

Center Hole Shield

Permits visual inspections of stroke alert and prevents entry of contaminants.

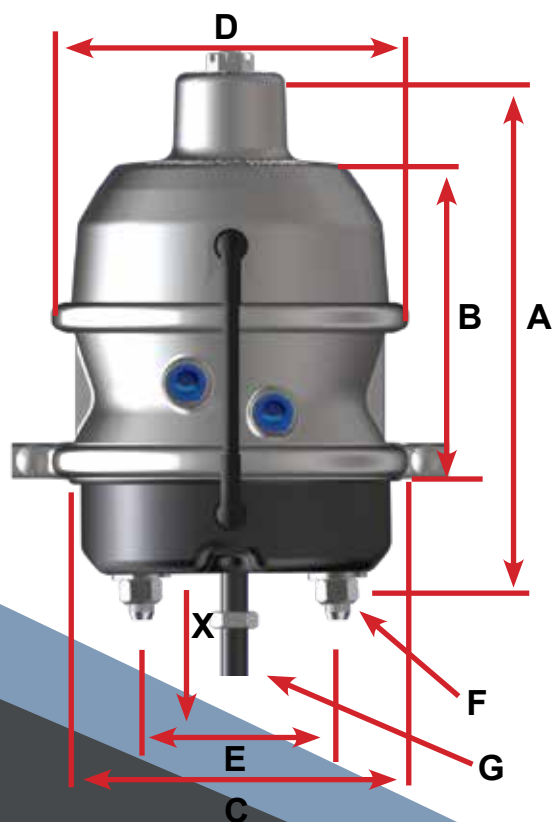

Model	LTR-T	LTR-T
Size	2430L-T	3030-T
Stroke	2.50"	2.50"
P/N Comb.	3827051	3831051
PB + Kit*	3827008	3831008
WT. Comb.	18.5	19.9
WT. Single	11.4	11.7
A	11.8	11.86
B	9.68	9.46
C	7.38	8.27
D	8.18	8.18
E	4.75"	
F	5/8" - 11UNC	
G	5/8" - 18UNF	
Inlets	3/8" - NPTF	
X (Min)	8.00"	

*PB+ Kit includes clamp band and diaphragm.

NOTE: Product information and specifications are subject to change without notice.

NOTE: Product information and specifications subject to change without notice.

www.mgmbrakes.com

